MONBAT BATTERIES

DATA SHEET

Date of update: 01.04.2026

MONBAT SLI EN A67L3W0_1 66 Ah

According to EN 50342



Electrical specification

Voltage:	**12V**
Capacity C^{20}:	**66 Ah**
Cold cranking current:	**580 A [EN]**
Cold cranking current:	**600 A [SAE]**

Mechanical specification

Dimensional group:	**L3**
ETN reference:	**566 048 058 SMF**
DIN reference:	**56648**
Dimensions[A] in mm (LxWxH):	**278x175x190**
Cell Layout:	**0**
Terminal Type:	**1**

Container

Case	**Material**	**Polypropylene**
	Bottom hold-down	**B13**
	Colour	**Black**

Lid	**Material**	**Polypropylene**
	Cover design	**SMF**
	Colour	**Black**

Vent caps	**Material**	**Polypropylene**
	Type	**SMF**
	Colour	**Black**

Handles	**Material**	**Polypropylene**
	Position	**Top - on lid**
	Colour	**Black**


Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	**C2**	**V2**	**E1**


Weight[B]

Battery weight in kg:	**10.70**
Acid weight in kg:	**5.80**
Total battery weight in kg:	**16.50**

Layout

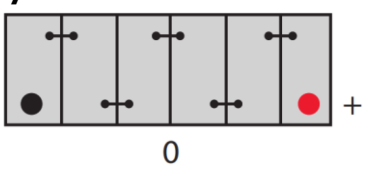

Hold-down

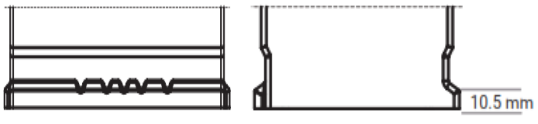

Separator

Type	**PE**

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.