

MONBAT SLI HD EP01BF0_1 170 Ah

According to EN 50342


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	170 Ah
Cold cranking current:	1000 A [EN]
Cold cranking current:	1050 A [SAE]

Mechanical specification

Dimensional group:	B
ETN reference:	670 043 100
DIN reference:	67043
Dimensions ^A in mm (LxWxH):	513x223x223
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Flat
	Colour	Black

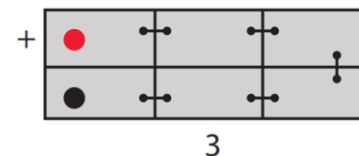
Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight in kg:	28.40
Acid weight in kg:	14.40
Total battery weight in kg:	42.80

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.