

MONBAT SLI HD EP33CF0_1 230 Ah

According to EN 50342


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	230 Ah
Cold cranking current:	1200 A [EN]
Cold cranking current:	1250 A [SAE]

Mechanical specification

Dimensional group:	C
ETN reference:	730 011 120
DIN reference:	73011
Dimensions ^A in mm (LxWxH):	514x276x242
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Flat
	Colour	Black

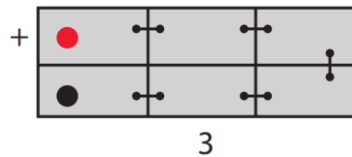
Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight in kg:	34.70
Acid weight in kg:	19.90
Total battery weight in kg:	54.60

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.