MONBAT BATTERIES

DATA SHEET

Date of update: 01.04.2026

START PREMIUM G177J7X0_1 72 Ah

According to EN 50342



EFB PREMIUM

Electrical specification

Voltage:	**12V**
Capacity C^{20}:	**72 Ah**
Cold cranking current:	**680 A [EN]**
Cold cranking current:	**700 A [SAE]**

Mechanical specification

Dimensional group:	**D26**
ETN reference:	**572 002 068**
DIN reference:	**57202**
Dimensions[A] in mm (LxWxH):	**260x170x220**
Cell Layout:	**0**
Terminal Type:	**1**

Container

Case	**Material**	**Polypropylene**
	Bottom hold-down	**B1**
	Colour	**Grey**

Lid	**Material**	**Polypropylene**
	Cover design	**SMF**
	Colour	**Grey**

Vent caps	**Material**	**Polypropylene**
	Type	**SMF**
	Colour	**Grey**

Handles	**Material**	**Polypropylene**
	Position	**Top - on lid**
	Colour	**Grey**

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	**C2**	**V2**	**E2**	**M2**

Weight[B]

Battery weight in kg:	**13.55**
Acid weight in kg:	**5.75**
Total battery weight in kg:	**19.30**

Layout

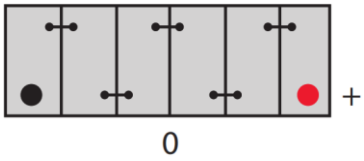

Hold-down

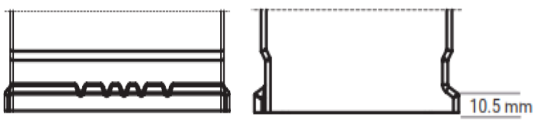

Separator

Type	**PE**

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.