

E901BX5_1 170 Ah

According to IEC 60095:2018



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	170 Ah
Cold cranking current:	950 A [EN]
Cold cranking current:	1000 A [SAE]
Cold cranking current:	650 [IEC]

Mechanical specification

Dimensional group:	B
ETN reference:	670 043 095
DIN reference:	67043
Dimensions ^A in mm (LxWxH):	513x223x223
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

Weight^B

Battery weight in kg:	28.00
Acid weight in kg:	14.30
Total battery weight in kg:	42.30

Layout

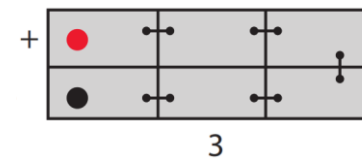

Hold-down



Separator

Type	PE with Glass Mat
------	-------------------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
 B. Weight may vary ±5%.