

**START SHD E944CX5\_1 230 Ah**

According to EN 50342



**Electrical specification**

Voltage:	12V
Capacity C <sup>20</sup> :	230 Ah
Cold cranking current:	1250 A [EN]
Cold cranking current:	1300 A [SAE]
Cold cranking current:	840 A [IEC]

**Mechanical specification**

Dimensional group:	C
ETN reference:	730 011 125
DIN reference:	73011
Dimensions <sup>A</sup> in mm (LxWxH):	514x276x242
Cell Layout:	3
Terminal Type:	1

**Container**

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


**Battery classification as per EN 50342-6**

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2

**Weight<sup>B</sup>**

Battery weight in kg:	36.30
Acid weight in kg:	19.60
Total battery weight in kg:	55.90

**Layout**

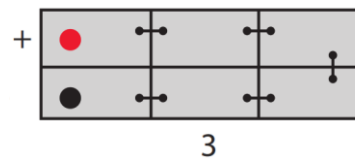

**Hold-down**



**Separator**

Type	PE with Glass Mat
------	-------------------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.  
B. Weight may vary ±5%.