

START SLI EN A67B3W0_1 66 Ah

According to EN 50342


SLI
Electrical specification

Voltage:	12V
Capacity C ²⁰ :	66 Ah
Cold cranking current:	580 A [EN]
Cold cranking current:	600 A [SAE]

Mechanical specification

Dimensional group:	LB3
ETN reference:	566 013 058 SMF
DIN reference:	56613
Dimensions ^A in mm (LxWxH):	278x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

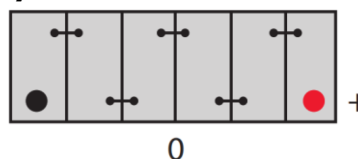

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E1

Weight^B

Battery weight in kg:	10.60
Acid weight in kg:	5.25
Total battery weight in kg:	15.85

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.