

START SLI HD G89C12F0_1 130 Ah

According to EN 50342


SLI
HEAVY DUTY

Electrical specification

Voltage:	12V
Capacity C ²⁰ :	130 Ah
Cold cranking current:	840 A [EN]
Cold cranking current:	890 A [SAE]

Mechanical specification

Dimensional group:	C12
ETN reference:	630 012 084
DIN reference:	63012
Dimensions ^A in mm (LxWxH):	345x175x285
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	FLAT
	Colour	Black

Vent caps	Material	Polypropylene
	Type	M27
	Colour	Black

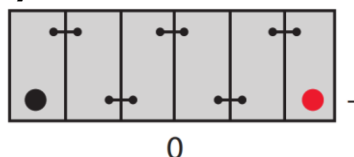
Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight:	11.70
Acid weight:	17.30
Total battery weight:	29.00

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.