

START SLI HD EP89BF0_1 143 Ah

According to EN 50342


SLI
HEAVY DUTY

Electrical specification

Voltage:	12V
Capacity C ²⁰ :	143 Ah
Cold cranking current:	800 A [EN]
Cold cranking current:	850 A [SAE]

Mechanical specification

Dimensional group:	B
ETN reference:	643 017 080
DIN reference:	64317
Dimensions ^A in mm (LxWxH):	513x223x223
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Flat
	Colour	Black

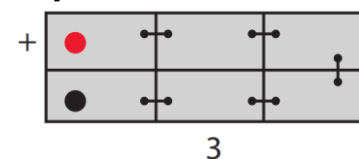
Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight in kg:	24.30
Acid weight in kg:	15.10
Total battery weight in kg:	39.40

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.