MONBAT BATTERIES

DATA SHEET

Date of update: 01.04.2026

START SLI HD EP90BF0_1 155 Ah

According to EN 50342



SLI HEAVY DUTY

Electrical specification

Voltage:	**12V**
Capacity C^{20}:	**155 Ah**
Cold cranking current:	**900 A [EN]**
Cold cranking current:	**950 A [SAE]**

Mechanical specification

Dimensional group:	**B**
ETN reference:	**655 013 090**
DIN reference:	**65513**
Dimensions[A] in mm (LxWxH):	**513x223x223**
Cell Layout:	**3**
Terminal Type:	**1**

Container

Case	**Material**	**Polypropylene**
	Bottom hold-down	**B0**
	Colour	**Black**

Lid	**Material**	**Polypropylene**
	Cover design	**Flat**
	Colour	**Black**

Vent caps	**Material**	**Polypropylene**
	Type	**Flat**
	Colour	**Black**

Handles	**Material**	**Polypropylene**
	Position	**Sides - on container**
	Colour	**Black**

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	**C2**	**V2**	**E1**

Weight[B]

Battery weight in kg:	**26.40**
Acid weight in kg:	**14.70**
Total battery weight in kg:	**41.10**

Layout

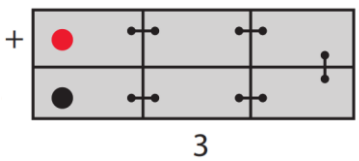

Hold-down

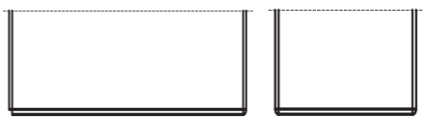

Separator

Type	**PE**

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.