

START SLI JIS KX55J4XB0_1 45 Ah

According to EN 50342



Electrical specification

Voltage:	12V
Capacity C ²⁰ :	45 Ah
Cold cranking current:	330 A [EN]
Cold cranking current:	350 A [SAE]

Mechanical specification

Dimensional group:	NS60
ETN reference:	545 023 033 SMF
DIN reference:	54523
Dimensions ^A in mm (LxWxH):	237x128x220
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E1

Weight^B

Battery weight in kg:	7.65
Acid weight in kg:	4.00
Total battery weight in kg:	11.65

Layout

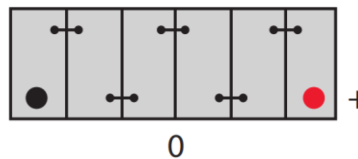

Hold-down



Separator

Type	PE
------	----

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
^{B.} Weight may vary ±5%.