

START SLI JIS KG55J3X0_1 35 Ah

According to EN 50342


SLI
Electrical specification

Voltage:	12V
Capacity C ²⁰ :	35 Ah
Cold cranking current:	300 A [EN]
Cold cranking current:	320 A [SAE]

Mechanical specification

Dimensional group:	NS40
ETN reference:	535 020 030 SMF
DIN reference:	53520
Dimensions ^A in mm (LxWxH)	197x128x220
Cell Layout:	0
Terminal Type:	3

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

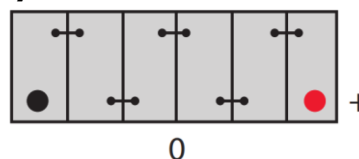
Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E1

Weight^B

Battery weight in kg:	6.90
Acid weight in kg:	3.20
Total battery weight in kg:	10.10

Layout

Hold-down

Separator

Type	PE
------	----

- ^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- ^{B.} Weight may vary ±5%.