

START SLI JIS G56J7X0_1 70 Ah

According to EN 50342


SLI
Electrical specification

Voltage:	12V
Capacity C ²⁰ :	70 Ah
Cold cranking current:	560 A [EN]
Cold cranking current:	580 A [SAE]

Mechanical specification

Dimensional group:	D26
ETN reference:	570 029 056 SMF
DIN reference:	57029
Dimensions ^A in mm (LxWxH):	260x170x220
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B1
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

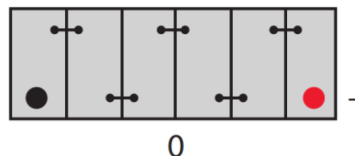
Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E1

Weight^B

Battery weight in kg:	11.05
Acid weight in kg:	6.15
Total battery weight in kg:	17.20

Layout

Hold-down

Separator

Type	PE
------	-----------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.