

START HD EC12BF0_1 180 Ah

According to EN 50342



HD series
HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C²⁰:	180 Ah
Cold cranking current:	1150 A [EN]
Cold cranking current:	675 A [DIN]

Mechanical specification

Dimensional group:	B
ETN reference:	680 032 115
DIN reference:	68032
Dimensions^A in mm (LxWxH):	513x223x223
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Flat
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight in kg:	30.10
Acid weight in kg:	13.40
Total battery weight in kg:	43.50

Layout

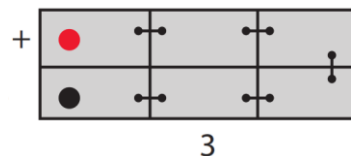

Hold-down



Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.