

MONBAT AGM Start-Stop GM78L3K3_1 70 Ah

According to EN 50342



**AGM
Start Stop**

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity C²⁰:	70 Ah
Cold cranking current:	760 A [EN]
Cold cranking current:	460 A [DIN]

Mechanical specification

Dimensional group:	L3
ETN reference:	570 901 076
DIN reference:	57001
Dimensions^A in mm (LxWxH):	278x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	KAMINA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	KAMINA
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W5	C2	V3	E3	M3


Weight^B

Battery weight in kg:	16.65
Acid weight in kg:	4.50
Total battery weight in kg:	21.15

Layout

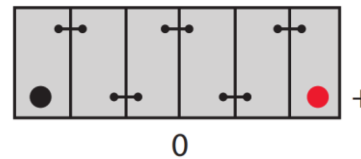

Hold-down



Separator

Type	AGM
-------------	------------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.