

EC34CX0_1 230 Ah

According to EN 50342



SMF series
HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C²⁰:	230 Ah
Cold cranking current:	1300 A [EN]
Cold cranking current:	780 A [DIN]

Mechanical specification

Dimensional group:	C
ETN reference:	730 112 130
DIN reference:	73011
Dimensions^A in mm (LxWxH):	514x276x242
Cell Layout:	4
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E1

Weight^B

Battery weight in kg:	36.90
Acid weight in kg:	18.60
Total battery weight in kg:	55.50

Layout

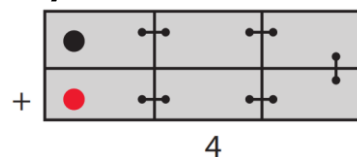

Hold-down



Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.