

MONBAT AGM HD GL01AK3_1 140 Ah

According to EN 50342



AGM series
HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C20:	140 Ah
Cold cranking current:	900 A [EN]
Cold cranking current:	600 A [IEC]
Cold cranking current:	500 A [DIN]

Mechanical specification

Dimensional group:	A
ETN reference:	640 901 090
DIN reference:	64001
Dimensions^A in mm (LxWxH):	513x189x220
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	Flat VRLA
	Colour	Black

Vent caps	Material	Polypropylene
	Type	VRLA
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W5	C2	V3/V4	E3/M3

Weight^B

Battery weight in kg:	30.8
Acid weight in kg:	8.7
Total battery weight in kg:	39.5

Layout

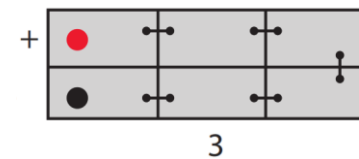

Hold-down



Separator

Type	AGM
-------------	------------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
^{B.} Weight may vary ±5%.