

MONBAT EFB SHD E800AX3_1 150Ah

According to EN 50342


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	150 Ah
Cold cranking current:	900 A [EN]
Cold cranking current:	950 A [SAE]

Mechanical specification

Dimensional group:	A
ETN reference:	650 002 090
DIN reference:	65002
Dimensions ^A in mm (LxWxH):	513x189x220
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Grey

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Grey

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Grey

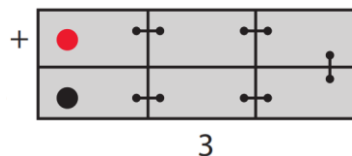
Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black

Battery classification as per EN 50342-1

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V3	E3

Weight^B

Battery weight in kg:	26.30
Acid weight in kg:	11.00
Total battery weight in kg:	37.30

Layout

Hold-down

Separator

Type	PE with Glass Mat
------	-------------------

^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

^{B.} Weight may vary ±5%.