

**MONBAT SLI HD E411M3F0\_1 155 Ah**

According to EN 50342


**Electrical specification**

|                            |                     |
|----------------------------|---------------------|
| Voltage:                   | <b>12V</b>          |
| Capacity C <sup>20</sup> : | <b>155 Ah</b>       |
| Cold cranking current:     | <b>1000 A [EN]</b>  |
| Cold cranking current:     | <b>1050 A [SAE]</b> |

**Mechanical specification**

|                                        |                    |
|----------------------------------------|--------------------|
| Dimensional group:                     | <b>MAC 143</b>     |
| ETN reference:                         | <b>655 104 100</b> |
| DIN reference:                         | <b>65504</b>       |
| Dimensions <sup>A</sup> in mm (LxWxH): | <b>514x218x210</b> |
| Cell Layout:                           | <b>3</b>           |
| Terminal Type:                         | <b>1</b>           |

**Container**

|      |                  |                      |
|------|------------------|----------------------|
| Case | Material         | <b>Polypropylene</b> |
|      | Bottom hold-down | <b>B3</b>            |
|      | Colour           | <b>Black</b>         |

|     |              |                      |
|-----|--------------|----------------------|
| Lid | Material     | <b>Polypropylene</b> |
|     | Cover design | <b>Flat</b>          |
|     | Colour       | <b>Black</b>         |

|           |          |                      |
|-----------|----------|----------------------|
| Vent caps | Material | <b>Polypropylene</b> |
|           | Type     | <b>Flat</b>          |
|           | Colour   | <b>Black</b>         |

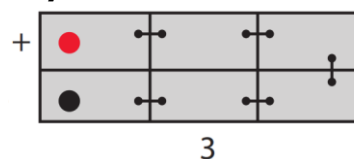
|         |          |                             |
|---------|----------|-----------------------------|
| Handles | Material | <b>Polypropylene</b>        |
|         | Position | <b>Sides - on container</b> |
|         | Colour   | <b>Black</b>                |

**Battery classification as per EN 50342-1**

|                   |                  |                      |                 |
|-------------------|------------------|----------------------|-----------------|
| Water consumption | Charge retention | Vibration resistance | Endurance Level |
| <b>W3</b>         | <b>C2</b>        | <b>V2</b>            | <b>E1</b>       |

**Weight<sup>B</sup>**

|                       |              |
|-----------------------|--------------|
| Battery weight:       | <b>25.90</b> |
| Acid weight:          | <b>13.60</b> |
| Total battery weight: | <b>39.50</b> |

**Layout**

**Hold-down**

**Separator**

|      |           |
|------|-----------|
| Type | <b>PE</b> |
|------|-----------|

<sup>A.</sup> Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

<sup>B.</sup> Weight may vary ±5%.