

G89C12F0_1 130 Ah

According to EN 50342



HD series
HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C²⁰:	130 Ah
Cold cranking current:	840 A [EN]
Cold cranking current:	500 A [DIN]

Mechanical specification

Dimensional group:	C12
ETN reference:	630 012 084
DIN reference:	63012
Dimensions^A in mm (LxWxH):	345x175x285
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Black

Lid	Material	Polypropylene
	Cover design	FLAT
	Colour	Black

Vent caps	Material	Polypropylene
	Type	M27
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W3	C2	V2	E1

Weight^B

Battery weight:	11.70
Acid weight:	17.30
Total battery weight:	29.00

Layout

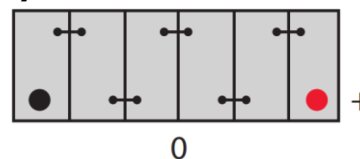

Hold-down



Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.